

# Product Specification.

*porcelain*

*All tips and guidelines should be taken as general advice and should be used in addition to the relevant Australian standards. These tips and advice are given in good faith. In no way do these replace the service of professional contractors / consultants.*



PAVERS  
Travertine Light Grey Cross  
Cut



PAVERS  
Travertine Mid Grey Cross  
Cut



PAVERS  
Travertine Navona Vein Cut



PAVERS  
Travertine White Cross Cut



PAVERS  
Alabastrino Natural Vein Cut



PAVERS  
Henley Light Grey



PAVERS  
Dogal Dark Grey



PAVERS  
San Remo Antracita



PAVERS  
San Remo Beige



PAVERS  
San Remo Blanco



PAVERS  
San Remo Gris



PAVERS  
Clarkson Ovster




PAVERS  
Clarkson Visone



PAVERS  
Clarkson White



PAVERS  
Dayton Bone

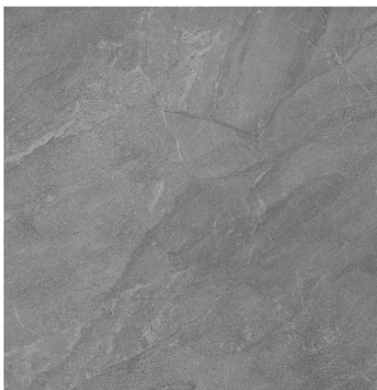

PAVERS  
Dayton Charcoal



PAVERS  
Dayton Grey



PAVERS  
Lytton Dark Grey





PAVERS  
St Lucia Calcutta



PAVERS  
Oxley Charcoal



PAVERS  
Oxley Earth



PAVERS  
Oxley Grey




PAVERS  
Oxley Sand




PAVERS  
Oxley White



PAVERS  
Soho Grey

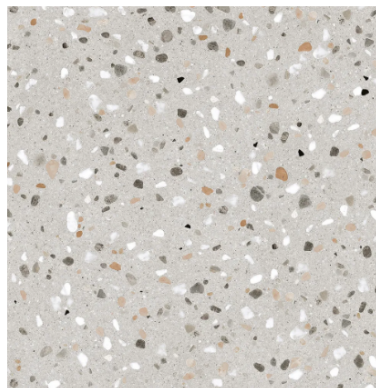

PAVERS  
Rocklea Earth

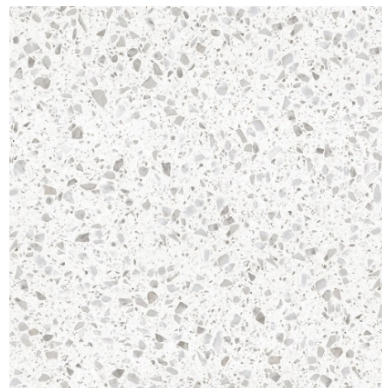

PAVERS  
Rocklea White

## Substrates/foundations/ underfloor heating

The key to preventing problems occurring after tile installation is the correct preparation of the substrate prior to fixing. All substrates that are to be tiled on, floor or wall, should always be suitably prepared. They should be clean, flat, level, free from movement and free from anything which could be deleterious to adhesion.

Correct identification of the substrate is vital to ensure the correct advice and ancillaries are provided. With the increasing use of large format & Split face materials on walls, it is imperative to ensure that the substrate has a suitable weight bearing capability to accommodate the desired material.

For guidelines on fixing to specific substrates please call us for further information. We have a team dedicated in natural stone installations who can help contact the relevant professional (Engineer, architect, building consultant) to produce a work method statement to be specified for the correct substrate, foundations and underfloor heating.

All information required about the stone weight Per/m<sup>2</sup> can be obtained by contacting us directly.

## Cutting

Stone is best cut with a bench saw with a diamond blade. The stone should be washed after cutting to remove all dirt and cutting paste.

*Please note that silica dust can be found in natural products and is recommend that safety and health-cautions are used whilst cutting.*

## Storage

All stone is best stored in a dry area where it will not be affected by the weather. At the very least ensure coverage with a tarp.

## Crystalline silica

Commonly known as silica dust this is found in sand, stone, concrete, mortar and variety of products in the construction industry including bricks and plastics. Silica dust particles if exposed can cause health issues.

To prevent and reduce this protective equipment must be worn whilst using tools to cut, grind, drill or other any other procedures that involve manipulating the stone. Safety guidelines relating to silica must be obeyed. For more information, please see the link below.

[safeworkaustralia.gov.au/safety-topic/hazards/crystalline-silica-and-silicosis](https://safeworkaustralia.gov.au/safety-topic/hazards/crystalline-silica-and-silicosis)

## Slip Test

Matte and structured finish porcelain all have there own unique slip rating - please request slip rating tests for each porcelain you require.



[naturalstonetiles.com.au](http://naturalstonetiles.com.au)

Richmond

(03) 9121 8888

591 Bridge Rd, Richmond

Hoppers Crossing

(03) 9748 7788

6 Nevada Crt, Hoppers Crossing

Geelong

(03) 5261 7777

327 Shannon Ave, Newtown